

(19)



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) Publication number:


**0 637 675 A1**

(12)

**EUROPEAN PATENT APPLICATION**(21) Application number: **93306162.4**(51) Int. Cl.<sup>6</sup>: **E21B 33/04, E21B 33/043, H01R 13/523**(22) Date of filing: **04.08.93**(43) Date of publication of application:  
**08.02.95 Bulletin 95/06**(84) Designated Contracting States:  
**AT BE CH DE DK ES FR GB GR IE IT LI LU MC NL PT SE**(71) Applicant: **COOPER INDUSTRIES INC.**  
**1001 Fannin Street,**  
**Suite 4000**  
**Houston**  
**Texas 77002 (US)**(72) Inventor: **Hopper, Hans Paul**  
**Hillhouse**  
**Whiterashes**  
**Aberdeen AB2 0QL**  
**Scotland (GB)**(74) Representative: **Jackson, Peter Arthur**  
**GILL JENNINGS & EVERY**  
**Broadgate House**  
**7 Eldon Street**  
**London EC2M 7LH (GB)**(54) **Electrical connection.**

(57) An electrical connection across a peripheral surface through a sealed enclosure (34A) in a radial plane between a tubing hanger (5) and a surrounding support member (3). The connection involves a coupling element (17) in the tubing hanger and a shuttle (20) which can reciprocate from a position wholly

within the support member, across the interface and into electrical connection with the coupling element, without producing any movement of a cable (9,10,11,15) leading into a sealed enclosure within the support.

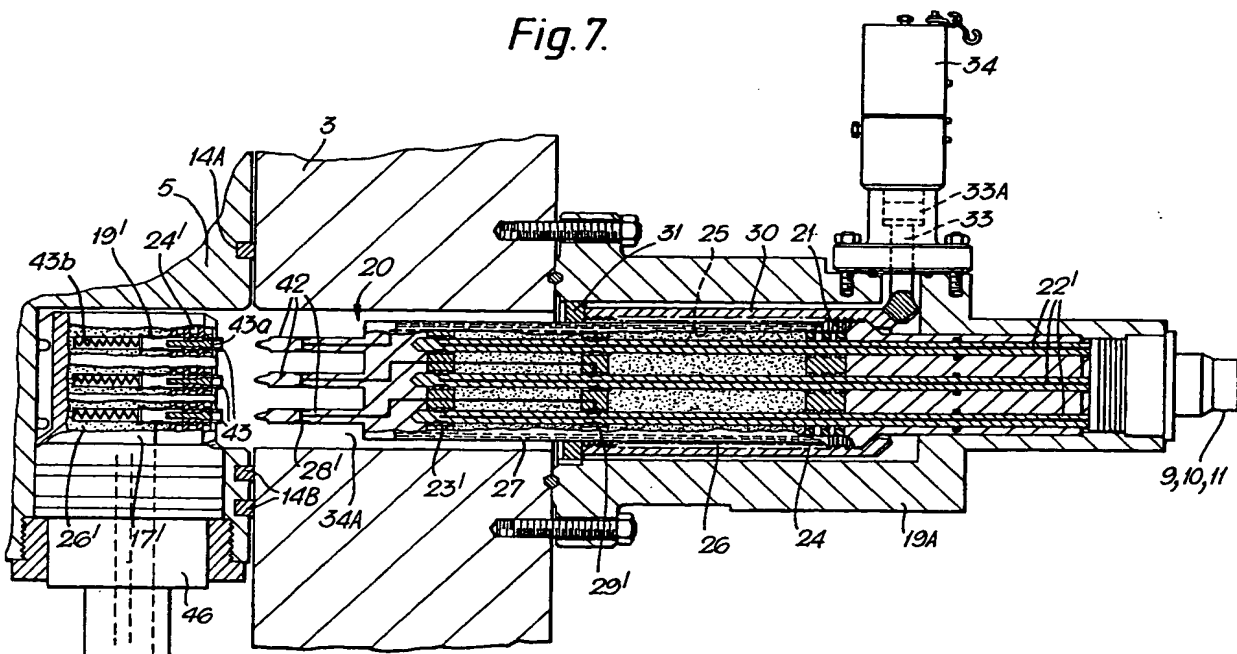*Fig.7.***EP 0 637 675 A1**

The present invention relates to an electrical connection between a radially inner and a radially outer member, for example, in a housing assembly of a wellhead of an oil or gas field.

Electrical connections are required in housing assemblies for high power circuits for running downhole equipment such as pumps and heating coils, and for electrical signals to and from downhole equipment. Such electrical connections are conventionally made through the top of the tubing hanger once the tubing hanger is landed in a housing or wellhead. The space available for the connections is therefore limited. This may result in the production bore being off-centre which has serious operational implications in ensuring equipment is correctly aligned. Furthermore, the blow out preventer has to be removed for access to the top of the tubing hanger. The tubing hanger then provides the only barrier, which causes a safety problem if the well is live.

The electrical connection must pass through a pressure boundary to the tubing hanger. In the case of a power core, full insulation is needed. As good insulators have generally poor sealing properties, sealing at the pressure boundary at the well temperature is difficult.

According to the present invention, an assembly providing an electrical connection across an interface between a radially inner member and a surrounding radially outer member, comprises a sealed enclosure between the inner and outer members; a cable which leads to the enclosure and is fixed and sealed to a wall of the enclosure, and which has at least one conducting core; an electrical coupling element within the inner member; and a shuttle which is reciprocable radially inwardly from a disconnected position wholly within the outer member to a connected position in which the shuttle makes an electrical connection from the conductor core to the electrical coupling element.

As the connection is made across a peripheral surface in a radial plane, it does not have to be through the top of the inner member, e.g. a tubing hanger. Therefore the space limitation of the prior art is avoided. Furthermore, when the invention is applied to the housing of a wellhead assembly, it eliminates the need to remove the blow out preventer.

It is the shuttle which bridges the gap across the enclosure between the inner and outer members and therefore prevents damage to the cable which is not exposed in the potentially hostile pressurised region between the two members. No electrical cables or components are required to move through a pressure barrier so that make up can be achieved in a constant volume void irrespective of the pressure.

As the shuttle does not have to contain pressure, there is no problem achieving an insulated connection.

In one embodiment, generally suitable for an electrical signal, a connecting cable connected to the cable is coiled within the enclosure and is fixed to the shuttle. The connecting cable may be an extension of the cable core. When the electrical connection is made up, the coil is simply extended.

Such flexible coiled cables are not practical for making electrical connections for power supplies. Therefore, as an alternative, the shuttle is slidable with respect to a fixed power core which provides a coupling element electrically connected to the cable core. Thus, only the shuttle is moved. The shuttle may be provided at either or both ends with a pin which mates with a corresponding socket of the respective coupling element to make the electrical connections, or the shuttle may be provided at either or both ends with a socket which mates with a corresponding pin of the respective coupling element to make the electrical connections.

For a large concentric production bore, the invention may be used in the housing of a wellhead assembly in which a plurality of connections are circumferentially disposed about the longitudinal axis of the tubing hanger, and have their lines of operation offset from the axis of the tubing hanger. For three phase power, three separate connections can be used. Preferably the lines of operation are tangential to a circle centred on the axis of the tubing hanger.

The space within the shuttle may be filled with a dielectric gel which is contained within a flexible bladder exposed to the surrounding pressure. This ensures that the pressure inside the shuttle remains constant with respect to the surrounding pressure and prevents any ingress of hostile fluids that could contaminate the gel. A series of gland type diaphragms may be provided at each end of the shuttle which seal with the respective coupling element, or close up in the absence of a coupling element in order to retain the gel within the shuttle. The complete sealing allows the connection to be made up under pressure.

The shuttle may be reciprocated by rotation of a screw threaded element coupled to the shuttle.

As an alternative to providing a plurality of connections circumferentially disposed about the axis of the tubing hanger, a plurality of cables may be connected in a single connection. In this case, there may be insufficient room in the wall of the tubing hanger to accommodate a set of single 90° couplings around a concentric bore. It may therefore be necessary to offset the bore of the tubing hanger from the axis of the tubing hanger.

This arrangement means that only one diver or ROV operation is necessary to make several con-

nections, thereby reducing the time taken, and hence the costs. Furthermore the cable does not have to be separated and then spliced together down the well.

One particularly advantageous way of offsetting the bore is to provide an axial bore in the top of the tubing hanger, which bore leads into an offset bore having a diameter smaller than that of the axial bore allowing a tubing string to be supported with its axis offset from the axis of the tubing hanger. This has the advantage that operations associated with the top of the tubing hanger, such as running tool operations, can still be performed in concentric mode. Furthermore, double barrier protection can be provided in the form of two concentric plugs in the axial bore. This means a BOP can be installed prior to the removal of the plugs, allowing safe access to a live well irrespective of its condition of completion.

This offset bore configuration provides an independent invention as it can be used in any application where more space is required at one side of the tubing hanger wall.

Wellhead assemblies incorporating examples of assemblies providing electrical connections according to the present invention will now be described with reference to the accompanying drawings, in which:-

Fig. 1 is a diagrammatic axial section through the wellhead assembly;

Fig. 2 is a radial section through the wellhead assembly showing first and second examples of the connector;

Fig. 3 is a section through a first example of a connector in the disconnected position;

Fig. 4 is a view similar to figure 3 in the connected position;

Fig. 5 is a diagram illustrating the principle of operation of the first example;

Fig. 6 is a section through a second example of a connector in the connected position;

Fig. 7 is a section through a third example of a connector in the disconnected position;

Fig. 8 is a section through a fourth example of a connector in the disconnected position; and

Fig. 9 is a view of a modified wellhead assembly incorporating a connector according to the third or fourth examples of the present invention.

The wellhead assembly comprises a wellhead 1 with a production casing 2. A spool body 3, such as a spool tree described in our copending application number 92305014.0, is installed on top of the wellhead. Production tubing 4 is run into the production casing until a tubing hanger 5 seats in the spool tree 3. The necessary valves and pipe work 6 are provided for the spool tree 3.

A downhole pump 7 is provided with three phase power from a power cable 8. This cable is

split into three single power cores 9,10 and 11 at a junction box 12. The three single power cores 9,10 and 11 are connected to the spool tree 3 by three coupling housings 13 circumferentially disposed around the spool tree 3. Only two of the couplings are shown in figure 1.

Three connections 14 which are constructed in accordance with a first example of the present invention provide the power connection bridging the gap between the spool tree 3 and the tubing hanger 5. Seals 14A,14B are provided above and below the connections 14 respectively. These seal with the spool tree 3 and tubing hanger 5 and together with seals to be described later form a sealed enclosure through which the connections 14 penetrate. The power cables run from the tubing hanger 5 down the well between the production casing 2 and the production tubing 4 to the single power cable 7. A downhole gauge cable 15 is additionally provided and a connection 16 for this (not shown in figure 1), constructed in accordance with a second example of the present invention, is provided between the spool tree 3 and the tubing hanger 5.

Figure 2 shows the three power connections 14 and one signal connection 16 circumferentially disposed around the spool tree 3 in a common radial plane. The power connections 14 are mounted tangentially, allowing more space for a larger concentric production bore.

The power connection 14 according to the first example of the invention is shown in greater detail in figures 3 and 4. A plug 17 is provided in the tubing hanger 5 and has a pin 18 provided with an electrical contact portion 19. A housing 19A is secured to the spool tree 3 and contains a shuttle 20. The shuttle 20 comprises a sleeve 21 which is slidable on a power core 22. A power cable 9,10,11 is sealed to the housing 19A and is screwed, potted and insulated in the conventional way. The power core 22 is electrically coupled to the power cable 9,10 and 11 through the sealing to the housing 19A. The core 22 is provided, at the end adjacent to the tubing hanger 5 with an electrical contact portion 23. Three gland type diaphragms 24 are provided at each end of the sleeve 21 and serve to seal between the sleeve 21 and power core 22,18. A flexible bladder 25 is provided within the sleeve 21, joins at each end to the diaphragms 24, and is filled with dielectric gel 26. A vent hole 27 in the sleeve 21 exposes the bladder to the surrounding pressure. The sleeve 21 has a first electrical contact portion 28 at its end closest to the tubing hanger 5 and a second electrical contact portion 29 spaced further inside the sleeve 21 than the first contacting portion 28.

The mechanism for driving the sleeve comprises a rotatable drive sleeve 30 which has a

female screw thread engaged with a male screw thread on the sleeve 21. An anti-rotation ring 31 prevents rotation of the sleeve 21. The drive sleeve 30 is coupled by means of a bevel gear 32 to a drive shaft 33. The shaft is sealed in the housing 19A by a bonnet valve seal 33A. This sleeve is driven by manual drive 34. Rotation of the drive shaft 33 causes rotation of the drive sleeve 30 which, by virtue of the anti-rotation ring 31, is translated to lateral movement of the sleeve 21. The manual drive 34 may be operated either by a diver or by ROV. Alternatively a modified sleeve can be used which is hydraulically operated.

The sealing between the cable 9,10,11 and the housing 19A, together with the seals 14A,14B and bonnet valve seal 33A form a sealed enclosure 34A in which the shuttle 20 reciprocates.

When the tubing hanger 5 is run into the spool tree 3, the sleeves 21 of the three power connections 14 are in their fully retracted positions, as shown in the top two examples illustrated in figure 2, in which they do not project into the production bore. Once the tubing hanger 5 has landed in the correct orientation, the sealed enclosure 34A is formed by seals 14A,14B. The enclosure 34A can then be flushed with dielectric oil through a system of ducts and valves (such as the valve 34B and duct 34C shown in figure 8) in order to remove any well completion fluid which may be trapped in the enclosure. The electrical connection can then be made up. Thus, manual drive 34 is operated, as described above, to cause the socket to move across the gap between the spool tree 3 and tubing hanger 5 and engage with the plug 17. As shown in figure 5, the first electrical contact portions 28 of the sleeve 21 are moved into contact with the electrical contact portions 19 of the pin 18 and the second electrical contact portions 29 of the sleeve 21 are moved into a electrical contact with the electrical contact portions 23 of the power core 22. Thus the electrical connection between the power core 22 and plug 17 is achieved. It should be noted that only the sleeve 21 moves. The sleeve 21 is within a pressure contained void which is pressure balanced by the bladder 25. The movement of the sleeve 21 and the electrical insulation are therefore not dependent on pressure.

The enclosure 34A can be periodically flushed with dielectric oil to remove any contaminants from the enclosure (e.g. through end duct 34C controlled by the valve 34B of figure 8).

As can further be seen from figure 5 a sensor contact 35 is provided which engages with the second electrical contact portion 29 of the sleeve 21 when the sleeve is in its fully retracted position. This then completes a circuit so an electrical signal will indicate that the sleeve 21 is in its fully retracted position.

Figure 6 shows a connector suitable for a signal cable 15. The signal cable 15 is fixed to the side of the spool tree 3 and leads to a connector 36 which connects it to a connecting cable 37, which is coiled within a sealed enclosure 34A in the spool tree 3. The connector 36 is sealed to the housing 19A with seals 36A. The connecting cable 37 is directly attached to a shuttle 20. An actuating stem 39, which is provided at one end with a manually operable adapter 40, is threadably engaged with respect to a non-rotatable mandrel connected to the shuttle 20. Stem packing 39A seals the stem 39 to the housing 19A and together with seals 14A,14B,36A serves to define the sealed enclosure 34A. A socket 41 having three connections for signal cables is provided in the tubing hanger 5. The number of signal cable connections is dependent on the particular application of the socket and is typically between one and twelve. Although not shown in figure 6, the shuttle 20 is provided with the same arrangement of gland type diaphragms, bladder and dielectric gel as that described in relation to the first example.

Rotation of the actuating stem 39 causes axial movement of the shuttle 20 thus reciprocating it into and out of engagement with the socket 41. When the shuttle 20 is in its engaged position, the coil of connecting cable 37 is extended without tensioning the cable 15.

A third example of a connector suitable for supplying three phase power is shown in figure 7. This is an alternative to the three separate power connections show in figure 2. The connector of the third example is similar to that described in figures 3 and 4 and the same reference numerals have been used. There are two main differences between the examples. Firstly, a single sleeve 21 provides connections for three power cables 9,10,11 at a single location. Each cable is provided with its own core 22' and associated connections 19',23',28',29'. Secondly, the end of the sleeve 21 closest to the tubing hanger 5 is provided with three pins 42 which mate with respective sockets 43. This arrangement can of course be incorporated in a connector for a single cable such as that of the first example. Each socket 43 is provided with a dummy pin 43a which is retained within the socket 43, seals with the gland type diaphragms 24', and is urged outwardly by a respective spring 43b. When a pin 42 engages with a respective socket 43, the dummy pin 43a is pushed back against the resilience of the respective spring 43b. Either the dummy pin 43a or the pin 42 is always sealed to the gland type diaphragm 24' thus preventing leakage of the dielectric gel 26'. To allow extra space for the springs 43b, the connection can be fitted with its line of action at a tangent to a circle around the axis of the tubing hanger 5, in a

similar manner to that shown for connections 14 shown in figure 2. Otherwise, a radial connection such as that shown in figure 2 for the connection 16 can be used.

Further pins and sockets can be provided for signal connections, or existing power pins can be provided with additional electrical contact portions for signals.

A fourth example is shown in figure 8 and differs from the examples shown in figure 7 only in that the end of the shuttle 21 remote from the tubing hanger 5 is also provided with pins 44 which reciprocate with respect to sockets 45 which are fixed with respect to the spool tree 3. In this case, the gel 26 is contained in the sockets 43, 45 which remain stationary. If the sockets 43 in the tubing hanger 5 are damaged, they can be retrieved by pulling the hanger. The sockets 45 in the spool tree 3 are not subjected to a penetration operation so that gland type diaphragms should not be damaged. Should it be needed, replacement gel can simply be injected into the sockets 45.

As can be seen from figures 7 and 8, a 90° connector 46 occupies a considerable amount of space within the tubing hanger 5. In order to allow for this, an example of a surface tree assembly, such as that shown in figure 9 can be provided. The tubing hanger 5 is provided with an axial bore portion 48. An offset bore portion 49 leads from the axial bore portion 48. The offset bore portion 49 is offset from and has a smaller diameter than the axial bore portion 48. As can be seen from figure 9, the offset bore portion 49 provides sufficient space for a connector 50 of the type according to the third and fourth examples. The provision of the axial bore portion 48 at the top of the tubing hanger ensures that many of the wellhead operations, such as running tool operations, can also be carried out in concentric mode. The well can be plugged using a conventional concentric plug 51. The surface tree can be readily adapted to provide a subsea tree assembly.

## Claims

1. An assembly providing an electrical connection across an interface between a radially inner member (5) and a surrounding radially outer member (3), the assembly comprising a sealed enclosure (34A) between the inner and outer members; a cable (9,10,11,15) which leads to the enclosure and is fixed and sealed to a wall of the enclosure, and which has at least one conducting core; an electrical coupling element (17,17',41) within the inner member; and a shuttle (20) which is reciprocable radially inwardly from a disconnected position wholly within the outer member to a connected position in which the shuttle makes an electrical connection from the conductor core to the electrical coupling element.
2. An assembly according to claim 1, wherein the shuttle (20) is slidable on a fixed power core (22,22') which provides a coupling element electrically connected to the cable core.
3. An assembly according to claim 2, wherein the shuttle (20) is provided at either or both ends with a pin (42,44) which mates, in use, with a corresponding socket (43,45) of the respective coupling element to make the electrical connection.
4. An assembly according to claim 1 or claim 2, wherein the shuttle (20) is provided at either or both ends with a socket (21) which mates, in use, with a corresponding pin of the respective coupling element (18,22) to make the electrical connection.
5. An assembly according to any one of the preceding claims, wherein the shuttle (20) is filled with a dielectric gel (26) which is contained within a flexible bladder (25) exposed to the surrounding pressure.
6. An assembly according to claim 5, wherein a plurality of gland type diaphragms (24) are provided at each end of the shuttle (20) which seal with the conducting element (22,22') and/or a conducting element (19) in the coupling element (17), or close up in the absence of a core in order to retain the gel (26) within the shuttle.
7. An assembly according to claim 1, wherein a connecting cable (37) connected to the cable (15) is coiled within the enclosure (34A) and is fixed to the shuttle (20).
8. An assembly according to any one of the preceding claims, wherein the shuttle (20), is reciprocated by rotation of a screw threaded element (33,39) coupled to the shuttle.
9. A tree assembly in which a tubing hanger (5) comprises an inner member, and wherein an assembly according to any one of the preceding claims is provided with a plurality of connections which are circumferentially disposed about the longitudinal axis of the tubing hanger, and have their lines of operation offset from the axis of the tubing hanger.

10. A tree assembly according to claim 9, wherein the lines of operation are tangential to a circle centred on the axis of the tubing hanger.
11. A tree assembly in which a tubing hanger (5) 5  
comprises an inner member, and wherein an electrical connection according to any one of claims 1 to 8 provides the connection between the tubing hanger and the surrounding member (5), the electrical connection providing a 10  
connection for a plurality of cables.
12. A tree assembly according to claim 11, wherein an axial bore (48) in the top of the tubing hanger leads into an offset bore (49) 15  
having a diameter smaller than that of the axial bore.
13. A tubing hanger (5) for a wellhead assembly, wherein an axial bore (48) is provided in the 20  
top of the tubing hanger, which bore leads into an offset bore (49) having a diameter smaller than that of the axial bore allowing a tubing string to be supported with its axis offset from the axis of the tubing hanger. 25

30

35


40

45


50

55


*Fig. 1.*

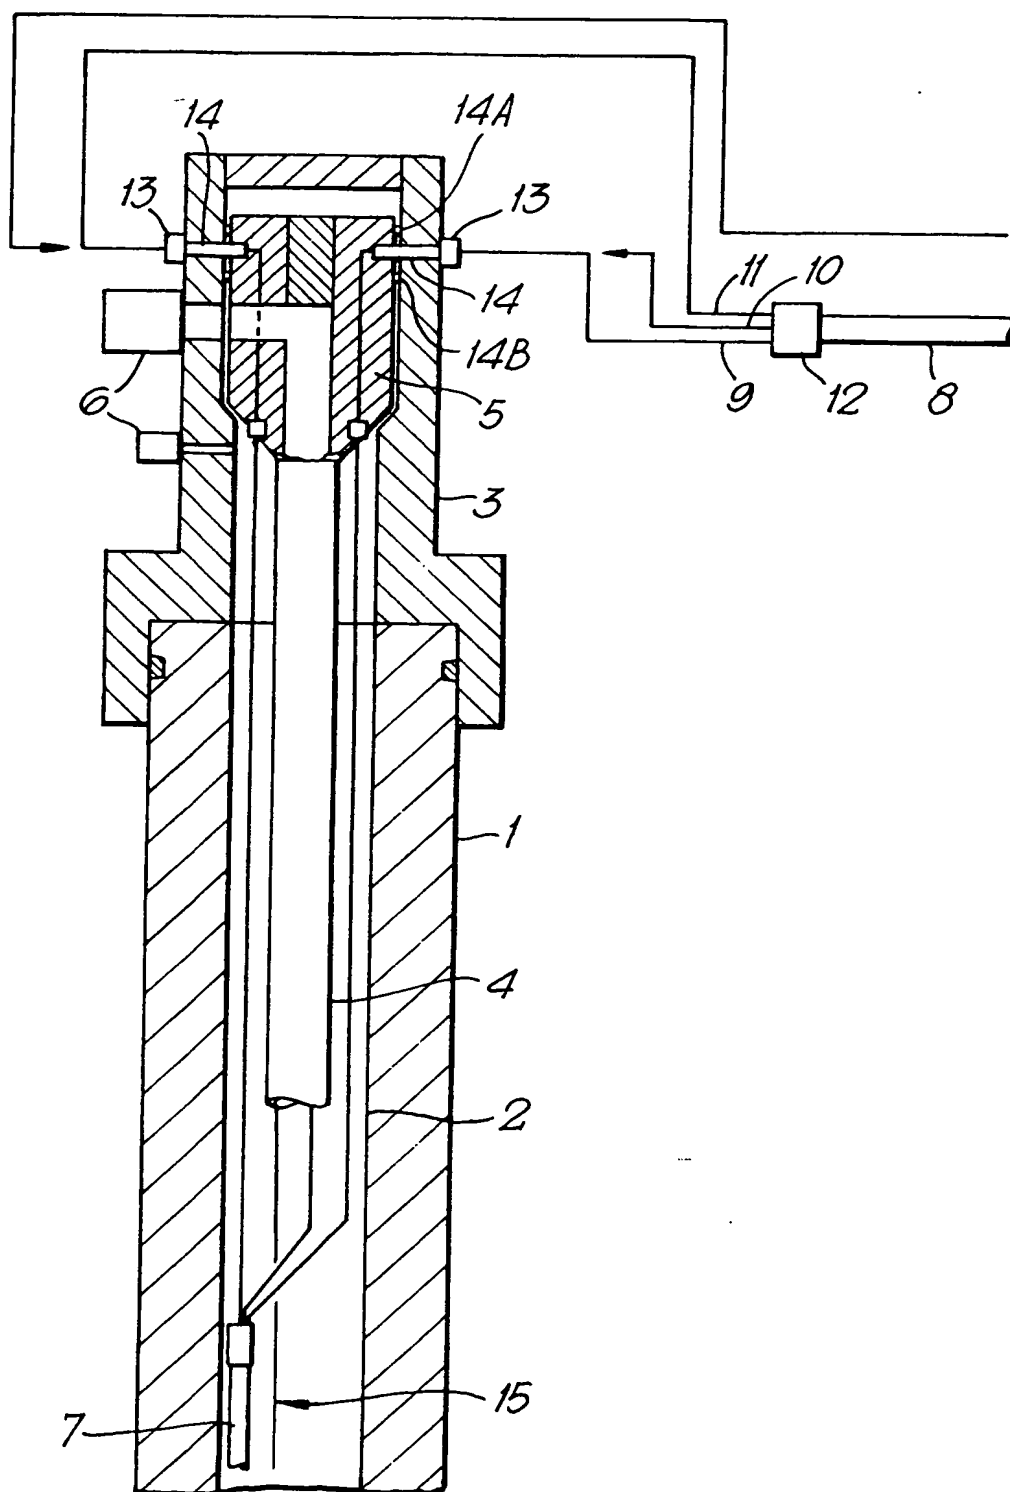

*Fig. 2.*

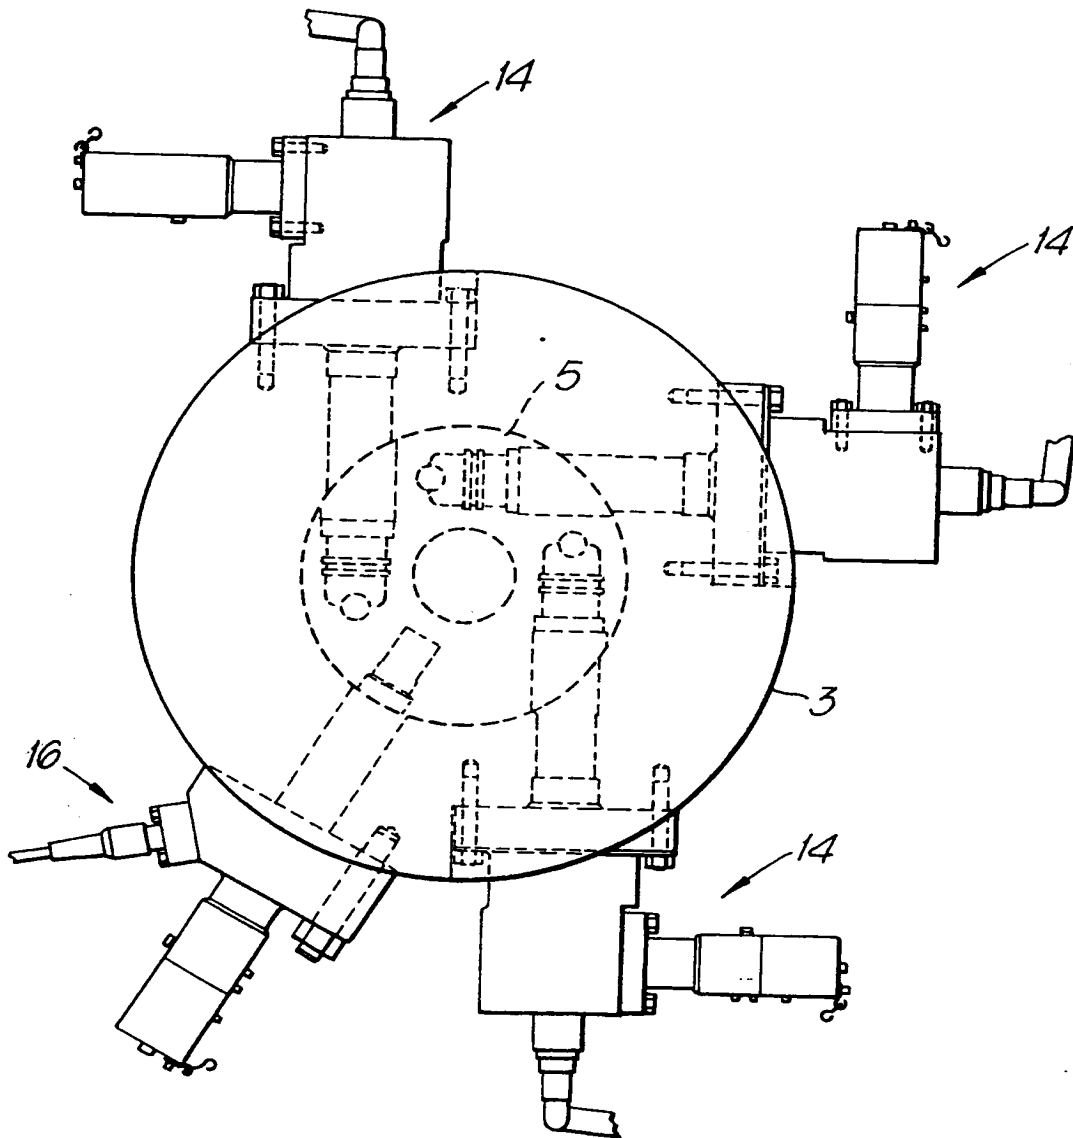



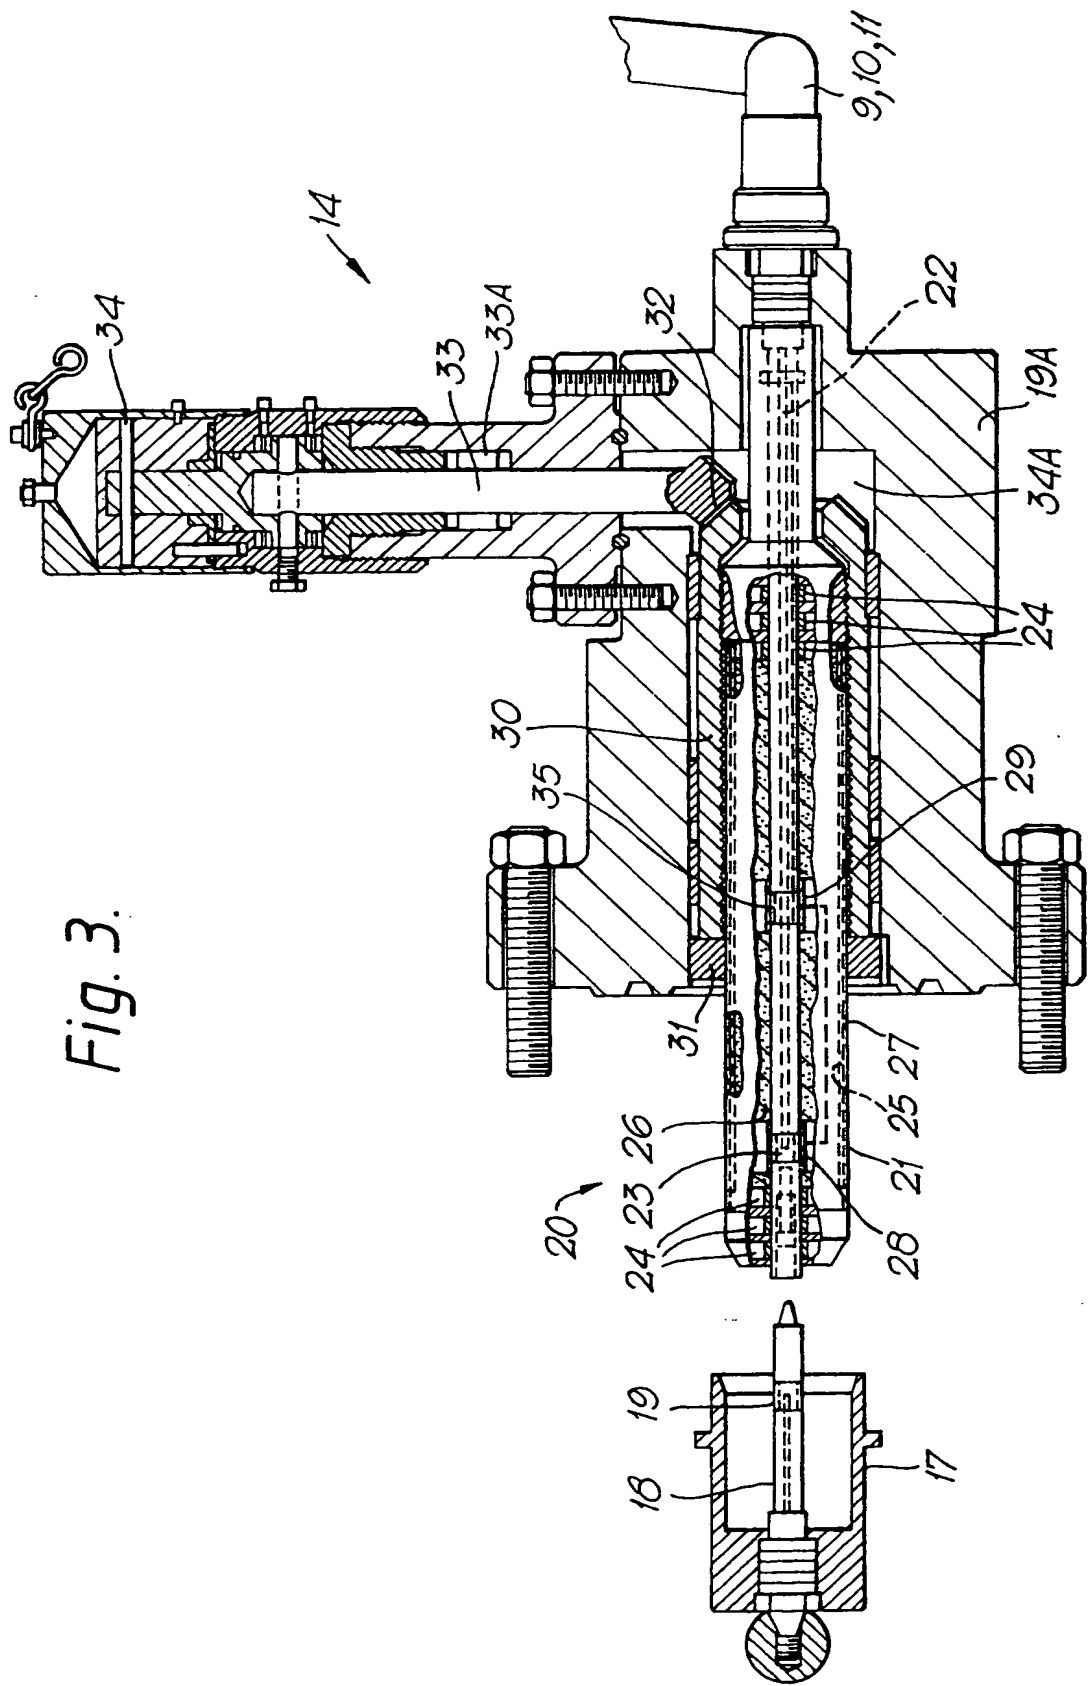

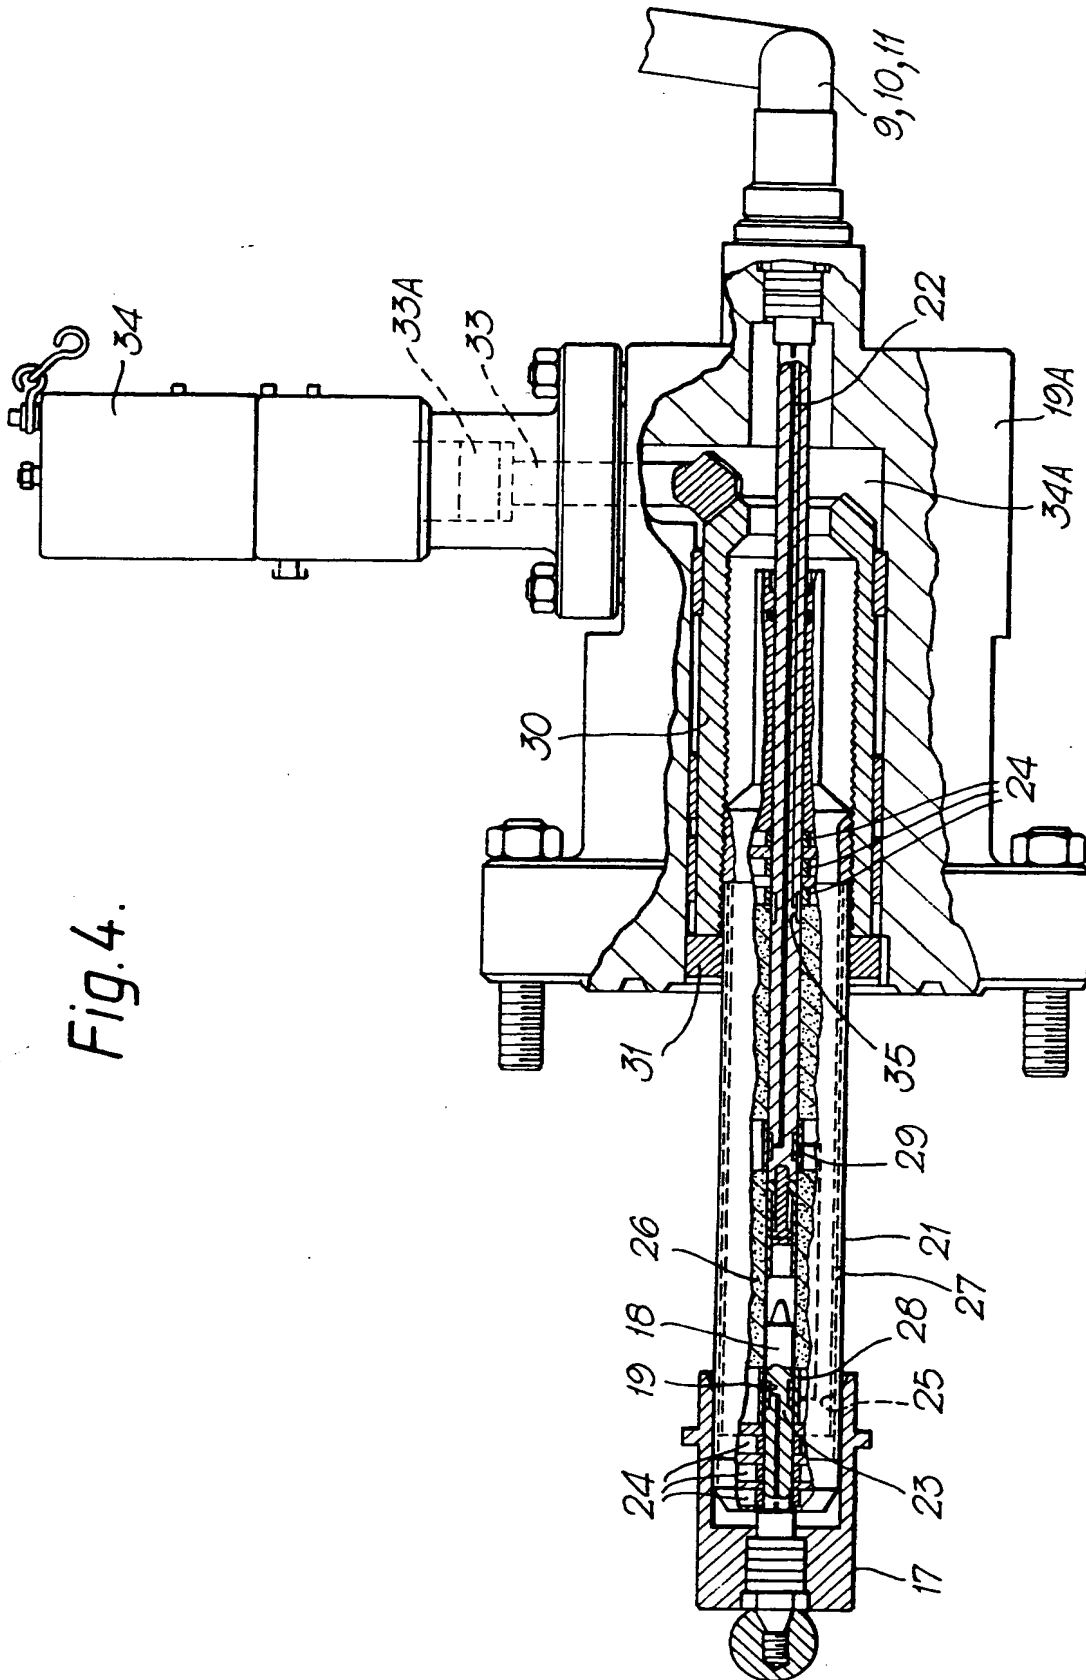


Fig. 5.

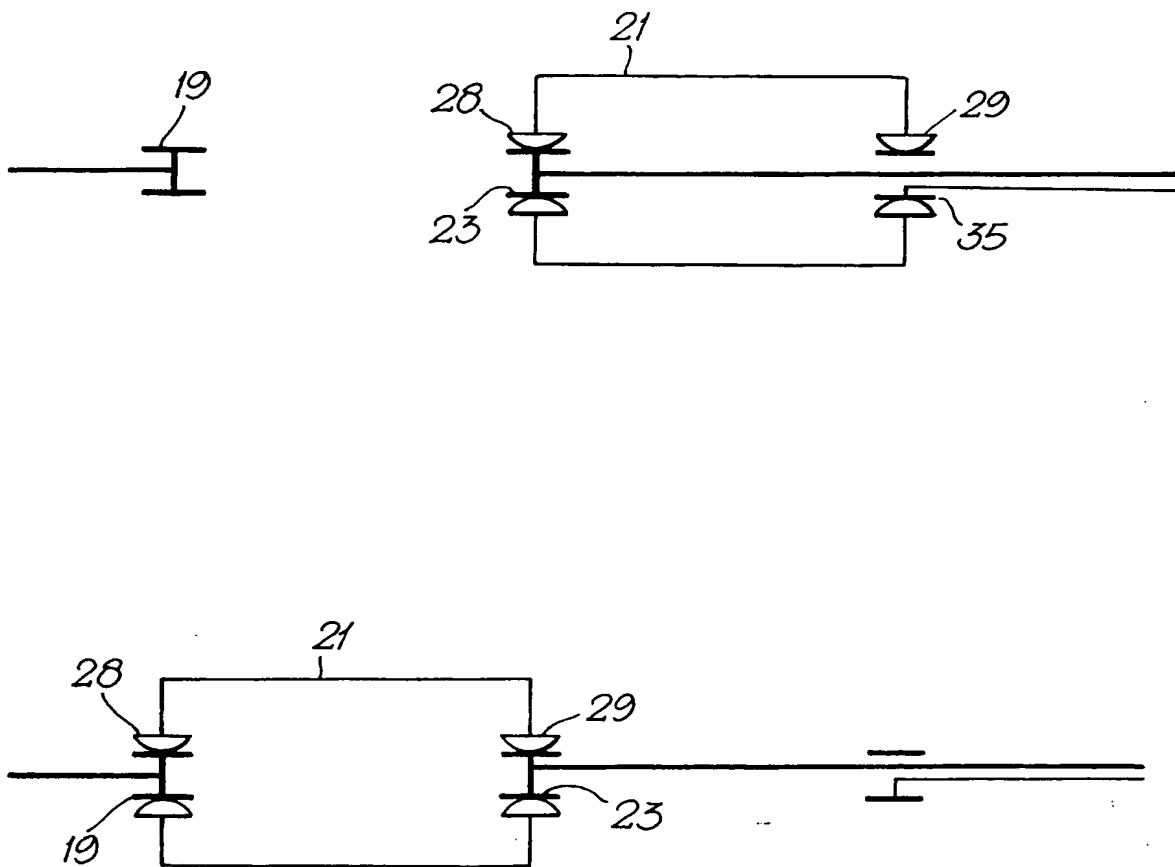


Fig. 6.

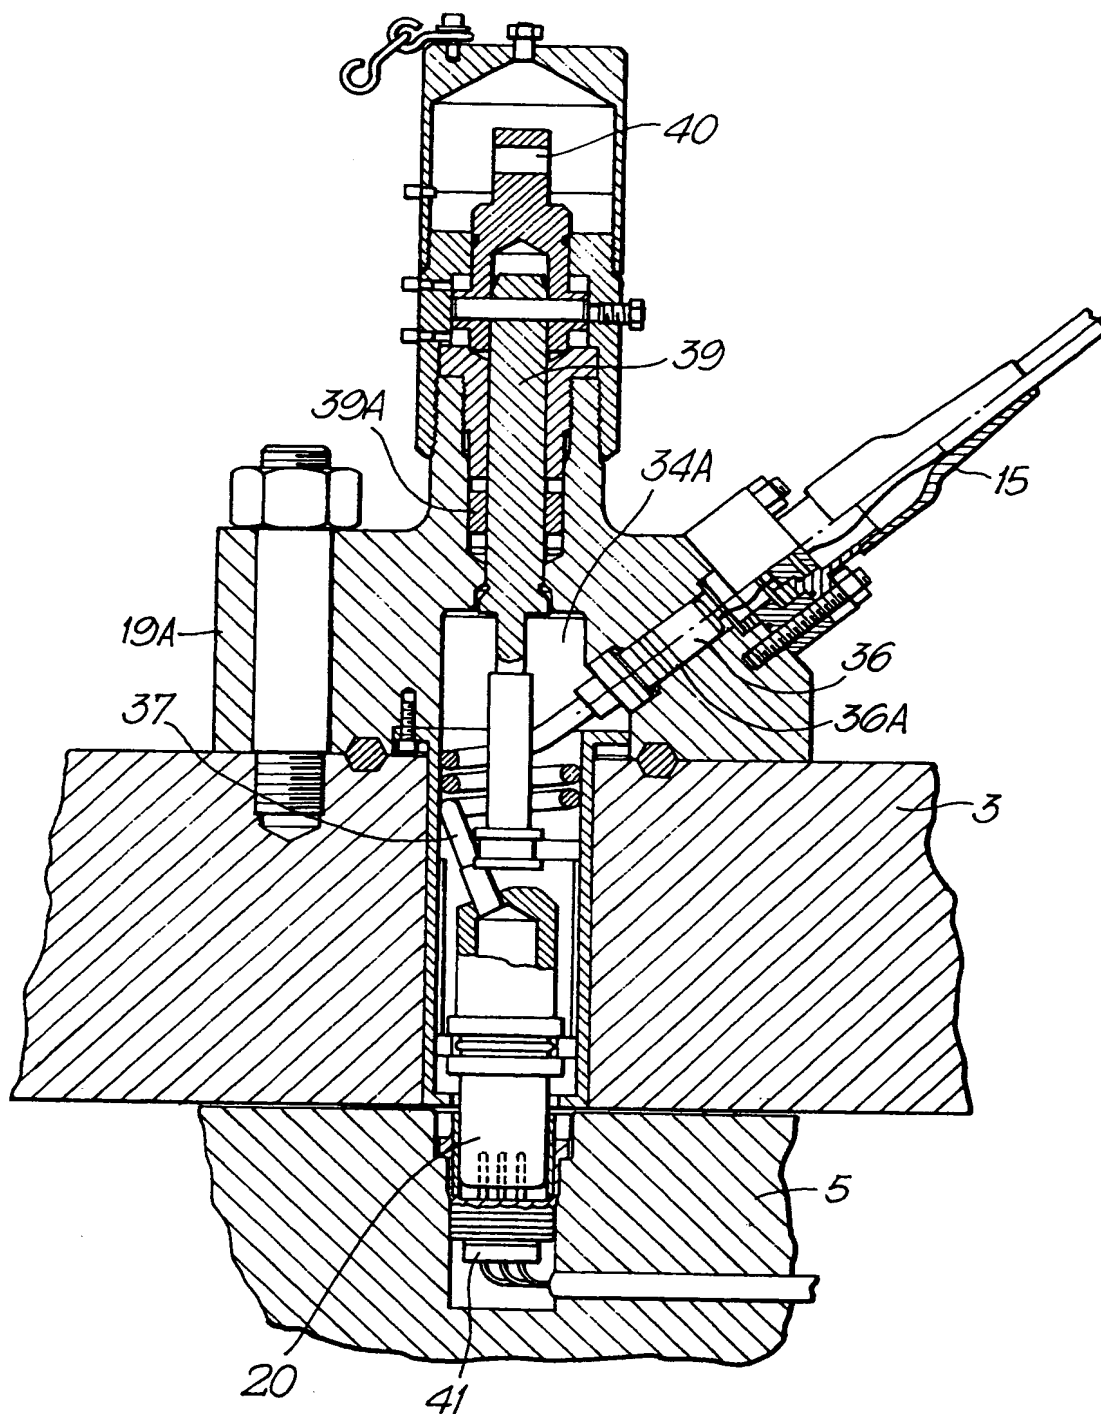


Fig.7.

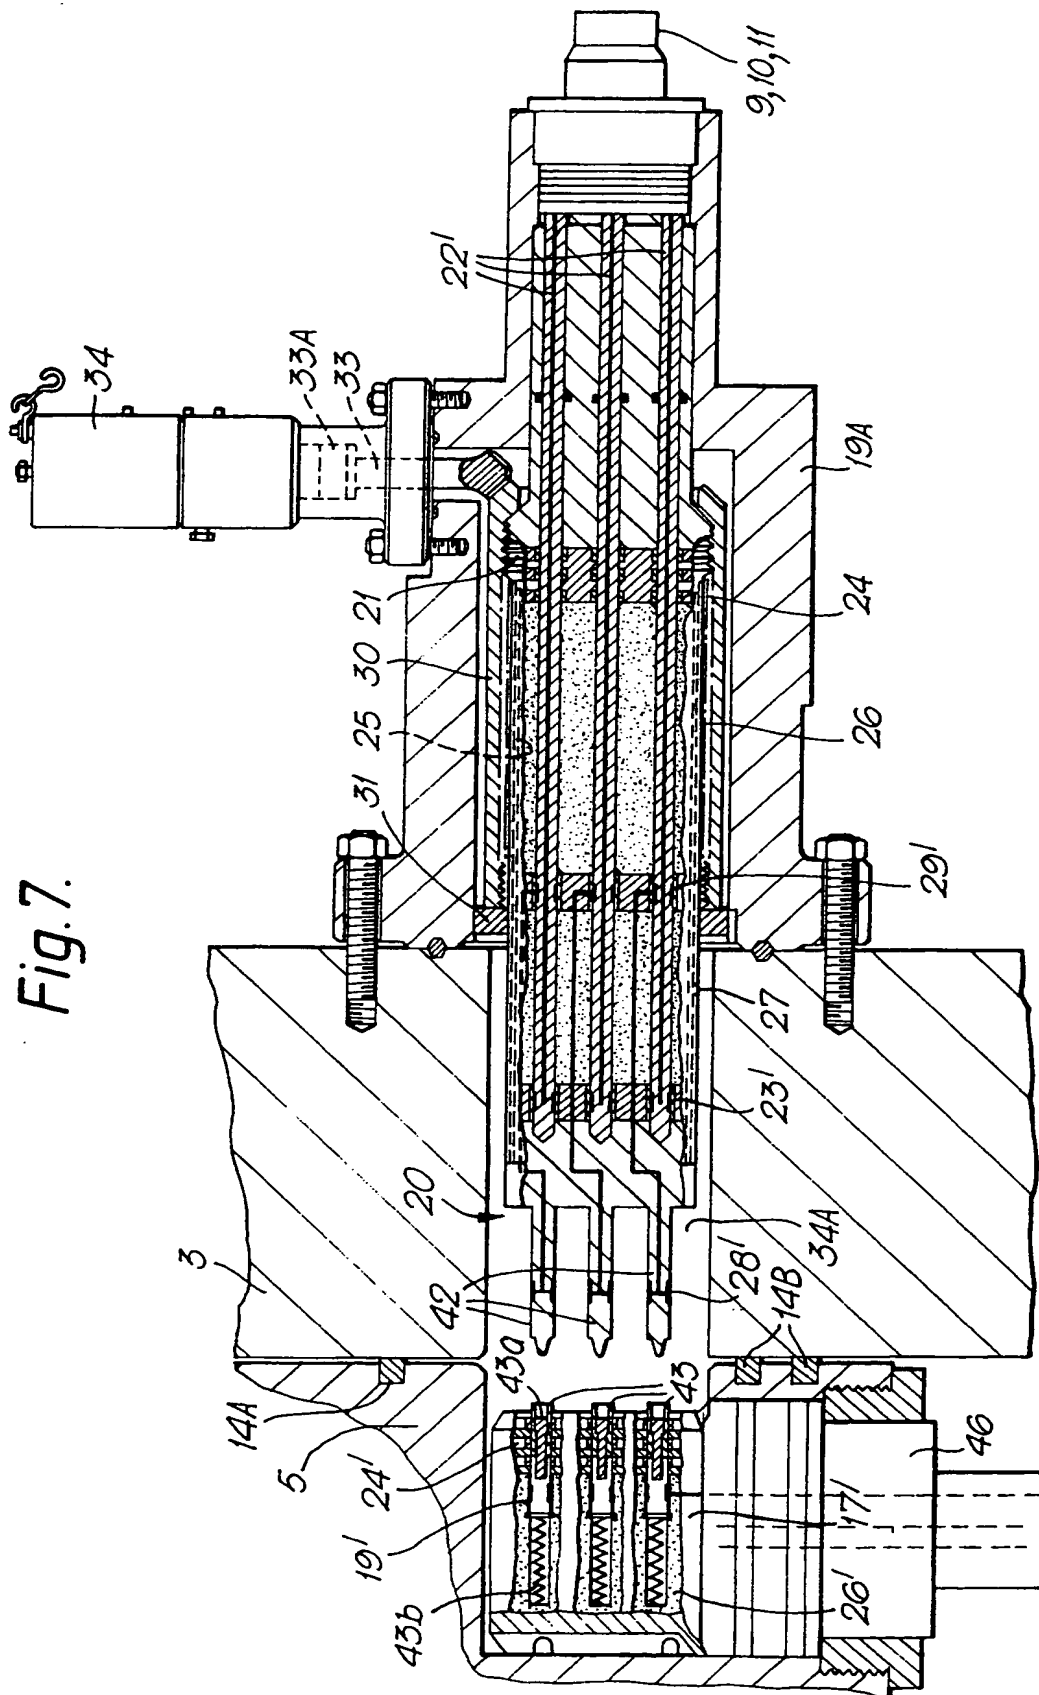


Fig.8.


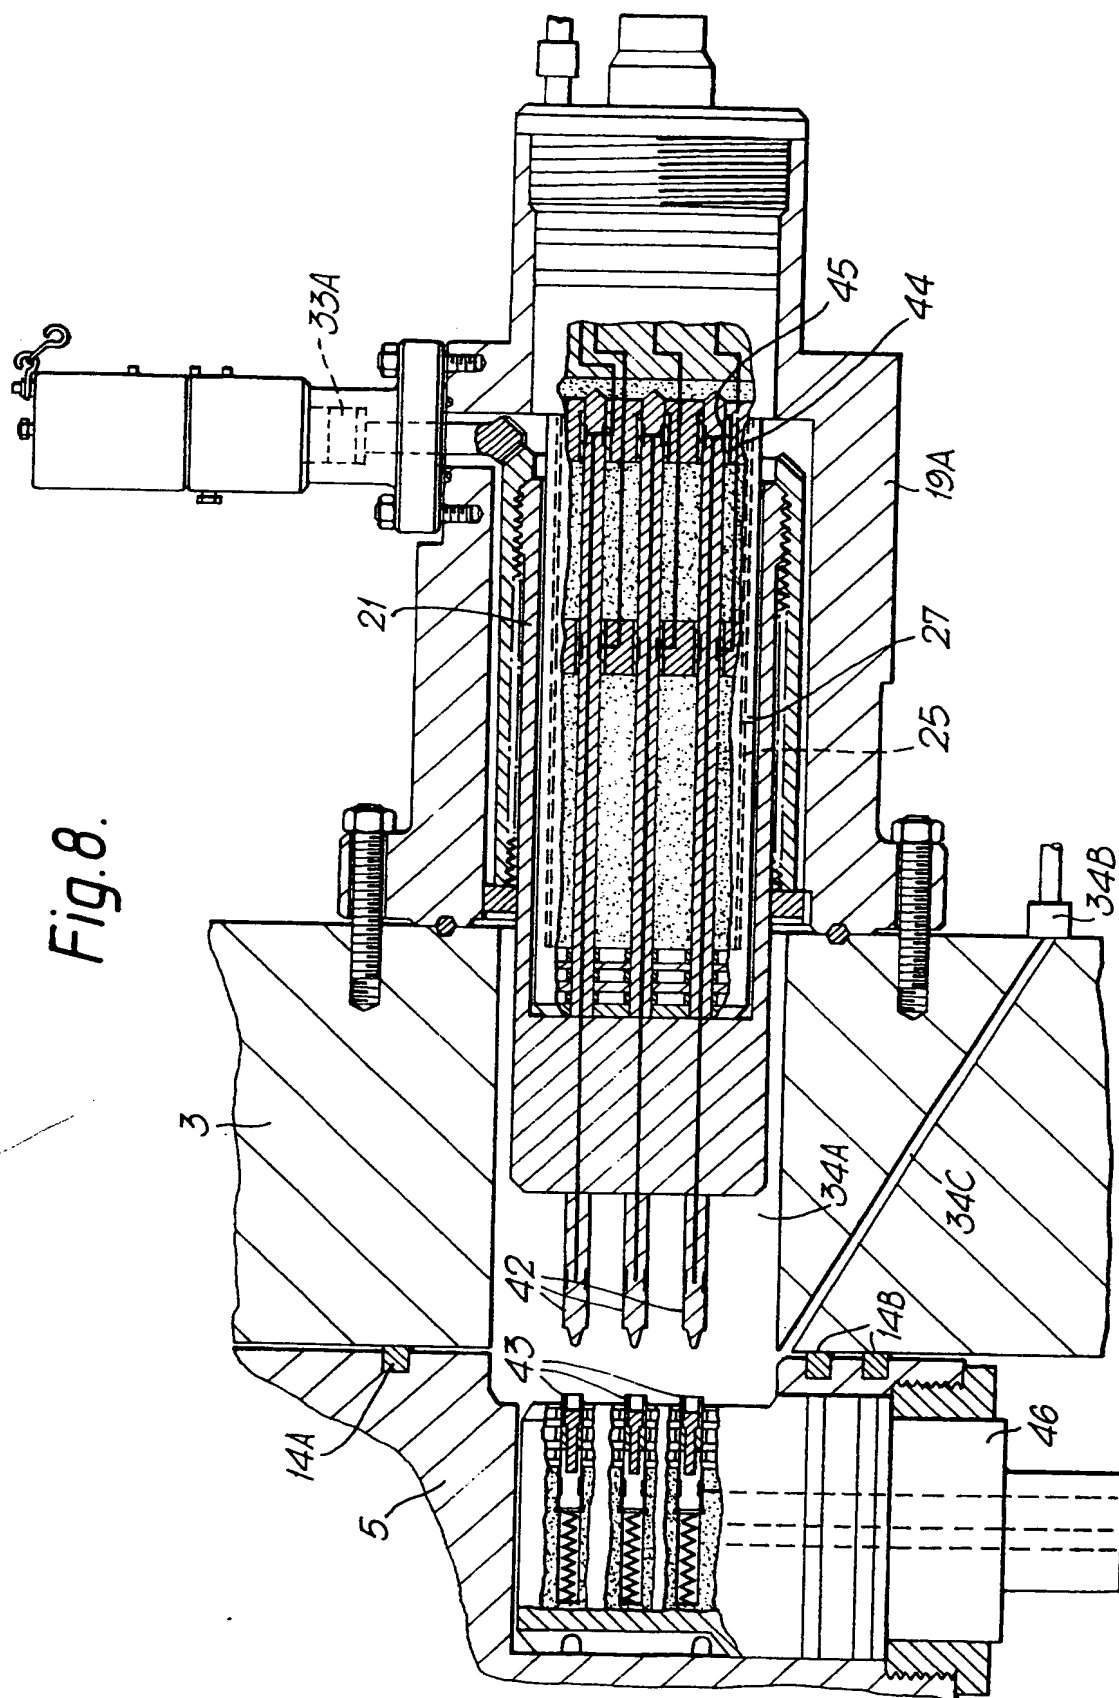


Fig. 9.



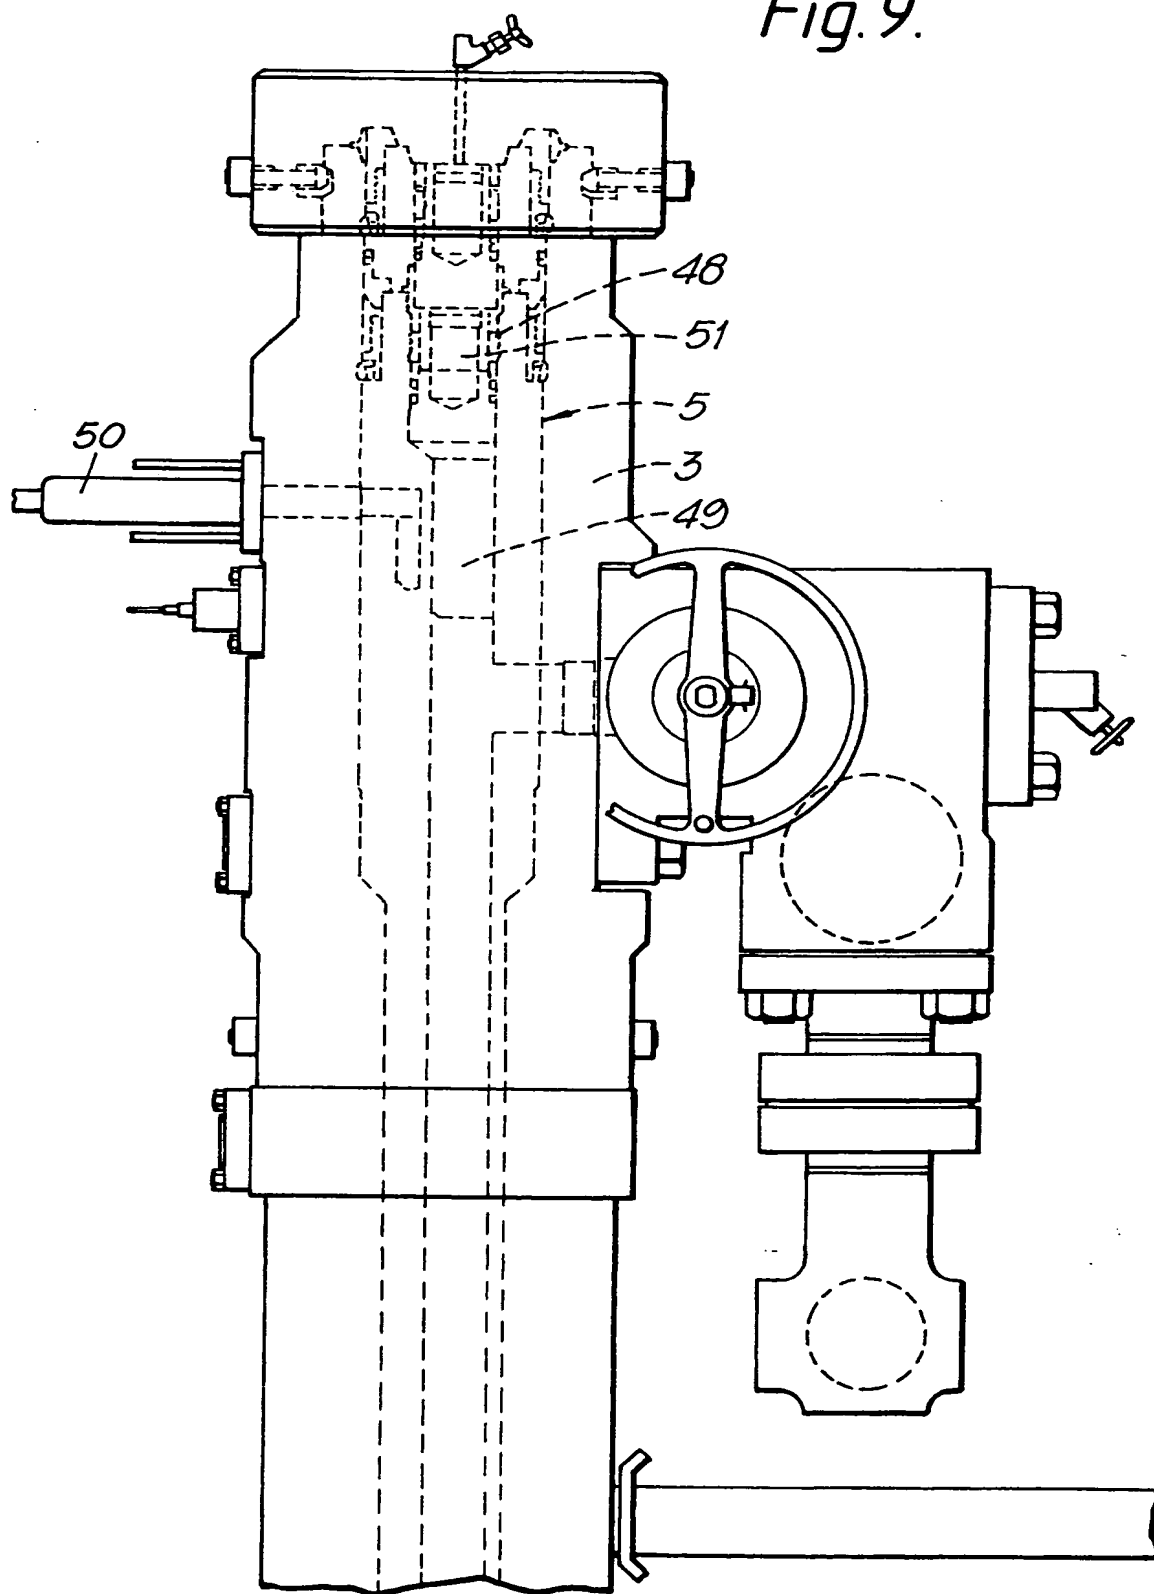

European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 93 30 6162

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	GB-A-2 165 284 (HUGUES TOOL COMPANY) * page 3, line 16 - line 42 *	1,7	E21B33/04 E21B33/043 H01R13/523
Y	---	4-6,8-11	
A	---	3,9	
Y	US-A-3 635 184 (LIAUTAUD) * column 1, line 67 - line 75 *	4,11	
A	---	1,3,7,8	
Y	US-A-5 194 012 (CAIRNS) * column 5, line 62 - line 68 *	5,6	
Y	US-A-3 848 949 (FALKNER) * column 5, line 59 - column 6, line 16 *	8	
A	---	1,3,7,9,11	
Y	US-A-3 151 892 (WORD) * column 4, line 10 - line 16; figure 2 *	9,10	
A	GB-A-2 058 881 (COMBUSTION ENGINEERING) * page 3, line 16 - line 31 *	1,4,9,11	TECHNICAL FIELDS SEARCHED (Int.Cl.6)
A	US-A-4 491 176 (REED) * the whole document *	1,3,4,9,11	E21B H01R F16B
A	US-A-4 907 980 (WAGAMAN) * column 2, line 60 - line 64 * * column 3, line 64 - column 4, line 31 *	5	
A	US-A-3 638 732 (HUNTSINGER) * column 5, line 21 - line 42 *	1,8,9,11	
A	US-A-3 043 371 (RECTOR) * column 4, line 43 - line 57; figures 1,2 *	9	
	---		
	-/--		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 11 April 1994	Examiner Sogno, M
<b>CATEGORY OF CITED DOCUMENTS</b> X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			





European Patent  
Office

### CLAIMS INCURRING FEES

The present European patent application comprised at the time of filing more than ten claims.

- ☐ All claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims and for those claims for which claims fees have been paid,  
namely claims:
- ☐ No claims fees have been paid within the prescribed time limit. The present European search report has been drawn up for the first ten claims.

### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions,  
namely:

see sheet -B-

- ☒ All further search fees have been paid within the fixed time limit. The present European search report has been drawn up for all claims.
- ☐ Only part of the further search fees have been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the inventions in respect of which search fees have been paid,  
namely claims:
- ☐ None of the further search fees has been paid within the fixed time limit. The present European search report has been drawn up for those parts of the European patent application which relate to the invention first mentioned in the claims.  
namely claims:



European Patent  
Office

## EUROPEAN SEARCH REPORT

Application Number  
EP 93 30 6162

### DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
A	US-A-3 807 497 (BAUGH) * column 9, line 65 - column 10, line 10; figure 5A *	12,13	
A	US-A-2 846 013 (DAVIS) * the whole document *	12,13	
A	US-A-3 721 296 (TUBBS) * column 2, line 59 - line 69 *	12,13	
A	US-A-4 736 799 (AHLSTONE) * the whole document *	12,13	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
The present search report has been drawn up for all claims			

Place of search

THE HAGUE

Date of completion of the search

11 April 1994

Examiner

Sogno, M

#### CATEGORY OF CITED DOCUMENTS

X : particularly relevant if taken alone  
Y : particularly relevant if combined with another  
document of the same category  
A : technological background  
O : non-written disclosure  
F : intermediate document

T : theory or principle underlying the invention  
E : earlier patent document, but published on, or  
after the filing date  
D : document cited in the application  
L : document cited for other reasons

& : member of the same patent family, corresponding  
document



European Patent  
Office

EP 93 30 6162 -B-

#### LACK OF UNITY OF INVENTION

The Search Division considers that the present European patent application does not comply with the requirement of unity of invention and relates to several inventions or groups of inventions, namely:

1. Claims 1-8,11: Electrical connection
2. Claims 9,10 : Tree assembly with a plurality  
of connections which are circumferentially  
disposed about the longitudinal axis  
of the tubing hanger
3. Claims 12,13 : Tubing hanger with an offset axial bore

**THIS PAGE BLANK (USPTO)**